

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 247 789 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
09.10.2002 Bulletin 2002/41

(51) Int Cl.7: **C04B 41/87**

(21) Application number: **02003026.8**

(22) Date of filing: **12.02.2002**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Martensson, Per**
131 34 Nacka (SE)

(74) Representative: **Taquist, Lennart et al**
Sandvik AB
Patent Department
811 81 SANDVIKEN (SE)

(30) Priority: **16.02.2001 SE 0100520**

(71) Applicant: **SANDVIK AKTIEBOLAG**
811 81 Sandviken (SE)

(54) **Alpha-alumina coated cutting tool**

(57) The present invention describes a coated cutting tool for metal machining. The coating is composed of one or more layers of refractory compounds of which at least one layer consists of essentially single-phase α -alumina with a pronounced columnar grain-structure and strong texture in the [300]-direction. The alumina layer is deposited by CVD (Chemical Vapor Deposition) and the preferred microstructure and texture are

achieved by adding a second metal halide, a texture modifying agent, to the reaction gas. When coated cemented carbide cutting tools according to the invention are used in the machining of steel or cast iron, several important improvements compared to prior art have been observed, particularly in the machining of nodular cast iron.

EP 1 247 789 A2

BEST AVAILABLE COPY

Description

[0001] The present invention describes a cutting tool for metal machining, having a substrate of cemented carbide, cermet or ceramics and on the surface of said substrate, a hard and wear resistant coating is deposited. The coating is adherently bonded to the substrate and covering all functional parts of the tool. The coating is composed of one or more refractory layers of which at least one layer consists of strongly textured α -alumina (α - Al_2O_3).

[0002] It is well known that for cemented carbide cutting tools used in metal machining, the wear resistance of the tool edge considerably can be increased by applying thin, hard surface layers of metal oxides, carbides or nitrides with the metal either selected from the transition metals from the groups IV, V and VI of the Periodic Table or from the group silicon, boron and aluminium. The coating thickness usually varies between 1 and 15 μm and the most widespread method for depositing such coatings is CVD (Chemical Vapor Deposition).

[0003] The practice of applying a pure ceramic layer such as alumina on top of layers of metal carbides and nitrides for further improvements of the performance of a cutting tool was early recognized as is evidenced in Re 29,420 (Lindström et al) and US 3,836,392 (Lux et al). Alumina coated cutting tools are further disclosed in US 4,180,400 (Smith et al), US 4,619,866 (Smith et al), US 5,071,696 (Chatfield et al), US 5,674,564 (Ljungberg et al) and US 5,137,774 (Ruppi) wherein the Al_2O_3 layers comprise the α - and κ -phases and/or combinations thereof. For example, in US 4,180,400, an alumina deposition process is disclosed where tetravalent ions of e.g. Ti, Zr or Hf are added in their halide compositions to the reaction gas mixture in order to deposit essentially single phase κ - Al_2O_3 .

[0004] The practice of mixing different metal halides in order to deposit composite ceramic coatings is evidenced in US 4,701,384 (Sarin et al), US 4,745,010 (Sarin et al) and US 5,827,570 (Russell) where processes for depositing mixtures of e.g. Al_2O_3 and ZrO_2 are described.

[0005] In further efforts to improve the cutting performance of alumina coated cemented carbide cutting tools, particularly in the machining of nodular cast iron, deposition processes yielding fine-grained, single phase α - Al_2O_3 exhibiting specific crystal orientation (texture) and surface finish are disclosed in US 5,654,035 (Ljungberg et al), US 5,766,782 (Ljungberg), US 5,834,061 (Ljungberg) and US 5,980,988 (Ljungberg).

[0006] None the less the machining of nodular cast iron is still considered to be a demanding metal working operation. This is particularly obvious in heavy and interrupted machining operations where an α - Al_2O_3 coated tool often suffers from extensive flaking of the alumina layer from the tool substrate. Hence, it is the object of the present invention to provide onto a hard tool substrate a relatively thick Al_2O_3 -layer of the polymorph α with a desired microstructure and crystallographic texture by applying a deposition process with suitable nucleation and growth conditions such that the acquired properties of the Al_2O_3 -layer provide an alumina coated cutting tool with improved cutting performance in steel, stainless steel, cast iron and, in particular, in nodular cast iron.

[0007] According to the present invention there is provided a cutting tool for metal machining such as turning (threading and parting), milling and drilling comprising a body of a hard alloy of sintered cemented carbide, cermet or ceramic onto which a hard and wear resistant refractory coating is deposited. Said coating comprises a structure of one or several refractory layers of which at least one layer consists of alumina with a layer thickness of 0.5-25 μm , preferably 1-10 μm . The alumina layer consists of essentially single phase α -alumina with a pronounced columnar grain-structure.

[0008] Figures 1 and 2 show Scanning Electron Microscope (SEM) cross-section micrographs at 8000X magnification of an α -alumina layer according to the present invention, Figure 1, and an Al_2O_3 -layer according to prior art technique, Figure 2. Figure 1 displays the characteristic columnar microstructure and Figure 2 displays a more coarse-grained microstructure typical of prior art.

[0009] Figures 3 and 4 show X-ray diffraction patterns for α - Al_2O_3 layers deposited according to the invention, Figure 3, and according to prior art technique, Figure 4.

[0010] Figures 5 and 6 show Light Optical Microscope (LOM) micrographs of worn cutting edges of a coated cutting insert according to present the invention, Figure 5, and according to prior art, Figure 6.

[0011] As a consequence of the fine-grained structure perpendicular to the growth direction of the α -alumina layer according to the invention, the cutting edges of the tool obtain a smooth surface finish, which compared to prior art α - Al_2O_3 coated tools, results in an improved surface finish also of the workpiece being machined.

[0012] The invented α - Al_2O_3 layer may also contain a low concentration of residues of a "texture modifying agent" which may be present in the form of separate grains or in the form of a solid solution with the alumina grains. The concentration of said residues can be found in the range 0.01-10, preferably 0.01-5 and most preferably less than 1 percent by weight of the α -alumina coating and the amount of said residues is low enough not to affect the intrinsic properties of the alumina coating itself.

[0013] The α - Al_2O_3 layer according to the present invention exhibits a preferred crystal growth orientation in the [300]-direction which is determined by X-ray Diffraction (XRD) measurements. Figures 3 and 4 show X-ray diffraction patterns for α - Al_2O_3 layers deposited according to the invention (Figure 3) and according to prior art technique (Figure 4). The very pronounced growth orientation in the [300]-direction is easily perceived from Figure 3.

[0014] A Texture Coefficient, TC, can be defined as:

$$TC(hkl) = \frac{I(hkl)}{I_0(hkl)} \left\{ \frac{1}{n} \sum \frac{I(hkl)}{I_0(hkl)} \right\}^{-1}$$

where

$I(hkl)$ = measured intensity of the (hkl) reflection.

$I_0(hkl)$ = standard intensity of the ASTM standard powder pattern diffraction data card number 43-1484.

n = number of reflections used in the calculation, (hkl) reflections used are: (012), (104), (110), (113), (024), (116), (300).

[0015] According to the present invention, TC for the set of (300)-crystalplanes is larger than 1.5, preferably larger than 3 and most preferably larger than 5.

[0016] The applied coating on the cutting tool may in addition to the strongly textured α - Al_2O_3 layer(s) contain at least one layer comprising a carbide, nitride, carbonitride, oxycarbide and/or oxycarbonitride of the metal elements (Me_1, Me_2, \dots) selected from the groups IVB, VB and VIB of the Periodic Table or from the group B, Al and Si and/or mixtures thereof, $(Me_1, Me_2, \dots)C_xN_yO_z$, $TiC_xN_yO_z$ being preferred. In a preferred embodiment the α - Al_2O_3 layer according to the present invention is preferably the outermost layer of the coating and the $TiC_xN_yO_z$ layer is the innermost layer of the coating. But metal- $C_xN_yO_z$ layers may also be deposited on top of the alpha-alumina layer(s). In a preferred embodiment the outer layer on top of the outermost α - Al_2O_3 layer is TiN.

[0017] The textured α - Al_2O_3 layer according to the invention is deposited by a CVD (Chemical Vapor Deposition) technique where the tool substrates to be coated are held at a temperature 950-1050 °C and are brought in contact with a hydrogen carrier gas containing one or more halides of aluminium, and a hydrolysing and/or an oxidizing agent. The oxidation potential of the CVD reactor atmosphere prior to the nucleation of Al_2O_3 is kept at a low level with a concentration of water vapor (H_2O) or other oxidizing species such as CO_2 , O_2 , etc., below 5 ppm. The nucleation of α - Al_2O_3 is started up by sequencing of the reactant gases that HCl and CO_2 are entering the reactor first in an Ar and/or H_2 atmosphere followed by $AlCl_3$. When nucleation of α - Al_2O_3 has occurred, a sulphur catalyst, preferably H_2S , is added to the reaction gas mixture in order to obtain the enhanced deposition rate.

[0018] Surprisingly, it has been found that when adding small amounts $ZrCl_4$ to the reaction gas mixture during the growth period of the α - Al_2O_3 layer, a crystallographic structure is attained having a very strong texture in the [300]-direction. The concentration of a second halide, a so-called texture modifying agent, preferably $ZrCl_4$, shall be in the range of 0.05-10, preferably 0.2-5 and most preferably 0.5-2 percent by volume of the total reaction gas volume.

[0019] The invented CVD method described above has made it possible to deposit α - Al_2O_3 layers with a desired micro structure and orientation and, said layers can be grown to a relatively large thickness, and surprisingly, still retain their excellent adhesion properties to the tool substrate as well as adding the desired improvement in wear resistance of the cutting tool which will be demonstrated in a forthcoming example. In order to further improve the properties of the coated cutting tool the surface may also be smoothened by a standard brushing technique.

[0020] The exact conditions of the CVD process depend to a certain extent upon the design of the equipment being used. It is within the purview of the person skilled in the art to determine whether the requisite texture and coating morphology have been obtained and to modify the nucleation and deposition conditions in accordance with the present specification, if desired, to affect the degree of texture and coating morphology.

EXAMPLE 1

[0021]

A) Cemented carbide cutting inserts with the composition 6.0 weight-% Co, and balance WC were coated with a 3 μm thick layer of TiCN in a standard CVD process. In subsequent process steps during the same coating cycle, a 7 μm thick layer of α - Al_2O_3 was deposited by the method described below.

A reaction gas mixture comprising H_2 , HCl and CO_2 was first introduced into the CVD-reactor. The reaction gases were sequentially added in the given order. After a pre-set time $AlCl_3$ was allowed into the reactor. During the deposition of Al_2O_3 , H_2S was used as a catalyst and $ZrCl_4$ as texture modifying agent. The gas mixtures and other process conditions during the Al_2O_3 deposition steps comprised:

	Step 1.	Step 2.
CO_2	5%	5%

(continued)

	Step 1.	Step 2.
AlCl ₃	2%	2%
ZrCl ₄	-	1%
H ₂ S	-	0.3%
HCl	2%	6%
H ₂	Balance	Balance
Pressure	55 mbar	55 mbar
Temperature	1010°C	1010°C
Duration	1 hour	3 hours

XRD-analysis showed a texture coefficient, TC(300), of 6.2 (average of ten inserts) of the single α -phase of the Al₂O₃-layer. SEM-micrographs showed a 7 μ m thick Al₂O₃-layer with a pronounced columnar grain-structure as is demonstrated in Figure 1.

B) Cemented carbide substrate of A) was coated with TiCN (3 μ m) and Al₂O₃ (7 μ m) as set forth in A) except that the Al₂O₃ deposition process was carried out according to prior art technique.

The gas mixtures and other process conditions during the Al₂O₃ deposition steps comprised:

	Step 1.	Step 2.
CO ₂	5%	5%
AlCl ₃	2%	2%
ZrCl ₄	-	-
H ₂ S	-	0.3%
HCl	2%	6%
H ₂	Balance	Balance
Pressure	55 mbar	55 mbar
Temperature	1010°C	1010°C
Duration	1 hour	3 hours

XRD-analysis showed a texture coefficient, TC(300), of 0.9 (average of ten inserts) of the single α -phase of the Al₂O₃-layer. The XRD-pattern is displayed in Figure 4. SEM-micrographs showed a 7 μ m thick Al₂O₃-coating with an equiaxed grain-structure as depicted in Figure 2.

EXAMPLE 2

[0022] Coated tool inserts from A) and B) were brushed using a standard production method in order to smoothen the coating surface. The cutting inserts were then tested with respect to edge line and rake face flaking in a turning operation, facing in nodular cast iron (AISI 60-40-18, DIN GGG40), a machining test which has proven to be a good benchmark test on the strength of the coating adhesion.

Cutting data:

Speed = 250 m/min

Depth of cut = 2.0 mm

Feed = 0.2 mm/rev

Coolant was used

[0023] The results are expressed in the table below as percentage of the edge line in cut on which flaking of the coating has occurred, and furthermore, the rake face area subjected to flaking in relation to the total contact area between the rake face and the workpiece chip. The numbers shown in the table below are average values for five tested cutting edges.

Coating	Edge line flaking	Rake face flaking
According to A	4%	<1%
According to B	53%	62%

[0024] Figures 5 and 6 show Light Optical Microscope (LOM) micrographs of worn cutting edges tested according to the above described method. Figure 5 shows the wear pattern of a coated cutting insert according to present the invention and Figure 6 shows the wear pattern of coated cutting insert according to prior art technique.

Claims

1. Cutting tool comprising a body of sintered cemented carbide, cermet or ceramic and on which at least on the functional parts of the surface of the body, a hard and wear resistant coating is applied and said coating comprising a structure of one or more refractory layers of which at least one layer consists of alumina **characterised in that** said alumina layer having a thickness of 0.5-25 µm, preferably 1-10 µm, and consisting of essentially single phase α-alumina textured in the [300]-direction with a texture coefficient larger than 1.5, preferably larger than 3, and most preferably larger than 5, the texture coefficient being defined as:

$$TC(hkl) = \frac{I(hkl)}{I_0(hkl)} \left\{ \frac{1}{n} \sum \frac{I(hkl)}{I_0(hkl)} \right\}^{-1}$$

where

$I(hkl)$ = measured intensity of the (hkl) reflection

$I_0(hkl)$ = standard intensity of the ASTM standard powder pattern diffraction data, card number 43-1484.

n = number of reflections used in the calculation (hkl) reflections used are: (012), (104), (110), (113), (024), (116) and (300).

2. Cutting tool according to claim 1 **characterised in that** said α-alumina layer contains between 0.01-10, preferably 0.01-5 and most preferably less than 1 percent by weight of residues of a texture modifying agent.
3. Cutting tool according to any of the preceding claims **characterised in** having at least one layer of thickness 0.1-10 µm, preferably 0.5-5 µm, comprising a nitride, carbide, carbonitride, oxycarbide and/or oxycarbonitride of the metal titanium ($TiC_xN_yO_z$) and that said layer is in contact with the α-alumina layer.
4. Cutting tool according to claim 3 **characterised in that** the outer layer is α-alumina.
5. Cutting tool according to any of the preceding claims **characterised in that** the outer layer is TiN.

6. Cutting tool according to any of the preceding claims **characterised in that** the surface of the coated cutting tool is smoothened by means of a brushing operation.
7. A method for producing a coated cutting tool, wherein at least one refractory layer consisting of α -alumina textured in the [300]-direction as per claim; 1, is deposited by CVD (Chemical Vapor Deposition) by which the tool surface to be coated is brought in contact with a hydrogen carrier gas containing one or more halides of aluminium and a hydrolysing and/or an oxidizing agent **characterised in that** the oxidation potential of the CVD-reactor atmosphere prior to the nucleation of α -alumina is kept at a low level with a concentration of water vapor (H_2O) or other oxidizing species preferably below 5 ppm, and that the nucleation of α -alumina is started up by the sequencing of the reactant gases that HCl and CO_2 are entering the reactor first in an H_2 and/or Ar atmosphere followed by $AlCl_3$, that the temperature is held at 950-1050°C during the nucleation period, that during the growth period of the α - Al_2O_3 layer a sulphur catalyst and a texture modifying agent are added, the catalyst preferably being H_2S and the texture modifying agent preferably being $ZrCl_4$.
8. A method according to claim 7 **characterised in that** the addition of a texture modifying agent, preferably $ZrCl_4$ to the reaction gas mixture shall be in the range of 0.05-10, preferably 0.2-5 and most preferably 0.5-2 percent by volume of the total reaction gas mixture.

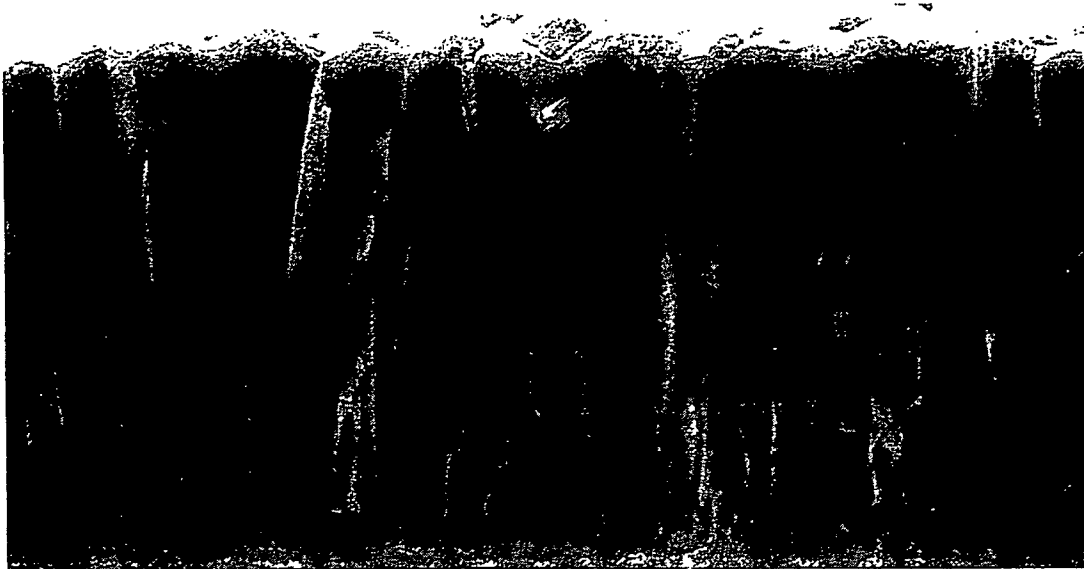


Figure 1



Figure 2

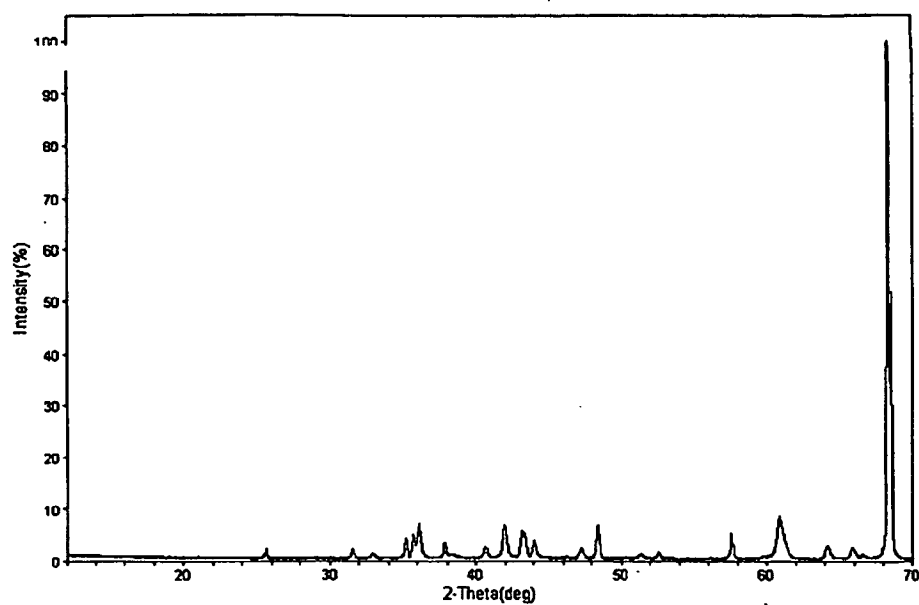


Figure 3

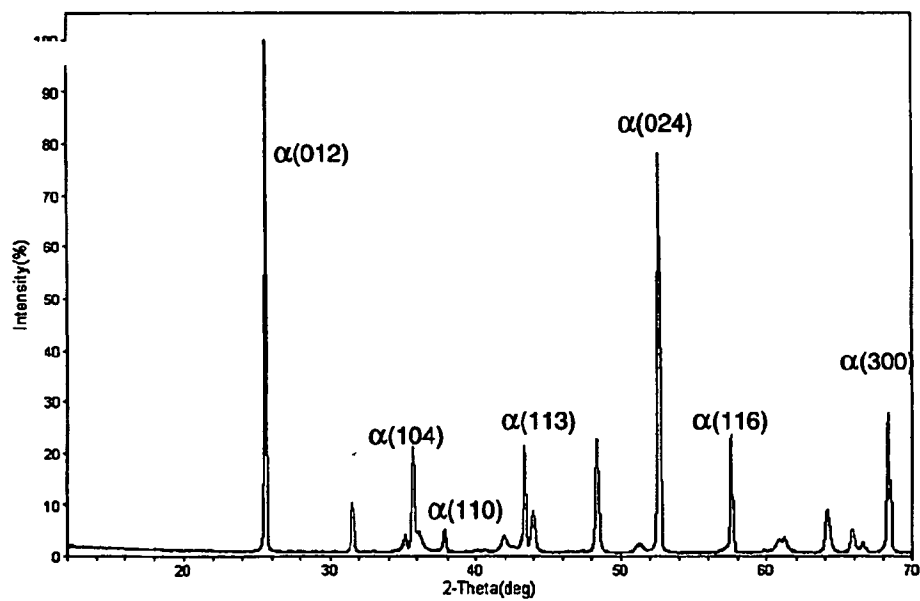


Figure 4

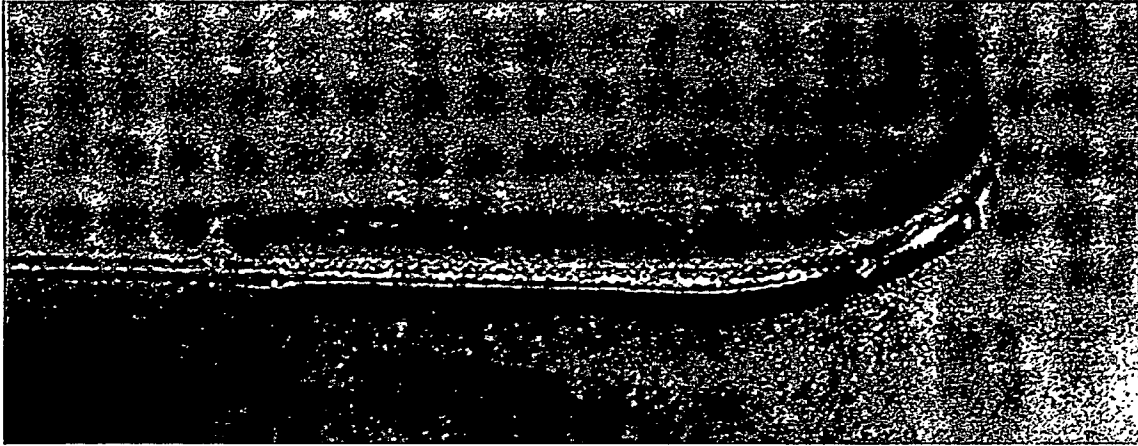


Figure 5



Figure 6



(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
31.03.2004 Bulletin 2004/14

(51) Int Cl.7: **C04B 41/87, C04B 41/89,**
C23C 16/40

(43) Date of publication A2:
09.10.2002 Bulletin 2002/41

(21) Application number: **02003026.8**

(22) Date of filing: **12.02.2002**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Martensson, Per**
131 34 Nacka (SE)

(74) Representative: **Taquist, Lennart et al**
Sandvik AB
Patent Department
811 81 Sandviken (SE)

(30) Priority: **16.02.2001 SE 0100520**

(71) Applicant: **SANDVIK AKTIEBOLAG**
811 81 Sandviken (SE)

(54) **Alpha-alumina coated cutting tool**

(57) The present invention describes a coated cutting tool for metal machining. The coating is composed of one or more layers of refractory compounds of which at least one layer consists of essentially single-phase α -alumina with a pronounced columnar grain-structure and strong texture in the [300]-direction. The alumina layer is deposited by CVD (Chemical Vapor Deposition) and the preferred microstructure and texture are

achieved by adding a second metal halide, a texture modifying agent, to the reaction gas. When coated cemented carbide cutting tools according to the invention are used in the machining of steel or cast iron, several important improvements compared to prior art have been observed, particularly in the machining of nodular cast iron.



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 00 3026

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X A	EP 0 999 293 A (HITACHI METALS LTD ;HITACHI TOOL ENG (JP)) 10 May 2000 (2000-05-10) * sample No. 22 * * example 2; table 7 * ---	1,3-6	C04B41/87 C04B41/89 C23C16/40
A	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 19, 5 June 2001 (2001-06-05) -& JP 2001 038504 A (MITSUBISHI MATERIALS CORP), 13 February 2001 (2001-02-13) * abstract * * table 3 * ---	1-8	
D,A	US 5 654 035 A (LJUNGBERG BJORN ET AL) 5 August 1997 (1997-08-05) * claims 1,5-8 * ---	1-8	
A	LUX B ET AL: "Preparation of alumina coatings by chemical vapour deposition" THIN SOLID FILMS, 1 APRIL 1986, SWITZERLAND, vol. 138, no. 1, pages 49-64, XP002266696 ISSN: 0040-6090 * the whole document * -----	1-8	TECHNICAL FIELDS SEARCHED (Int.Cl.7) C04B C23C
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 13 January 2004	Examiner Rosenberger, J
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 00 3026

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-01-2004

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0999293 A	10-05-2000	JP 2000144427 A	26-05-2000
		EP 0999293 A1	10-05-2000
		US 6333103 B1	25-12-2001

JP 2001038504 A	13-02-2001	NONE	

US 5654035 A	05-08-1997	SE 501527 C2	06-03-1995
		AT 145437 T	15-12-1996
		BR 9305108 A	21-06-1994
		CN 1091683 A ,B	07-09-1994
		DE 69306089 D1	02-01-1997
		DE 69306089 T2	13-03-1997
		EP 0603144 A1	22-06-1994
		IL 107977 A	14-08-1997
		JP 3325987 B2	17-09-2002
		JP 6316758 A	15-11-1994
		RU 2117074 C1	10-08-1998
		SE 9203852 A	19-06-1994
		US 5487625 A	30-01-1996

EPO FORM P0458

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.